

# ***GF7050V-M7 BIOS Setup***

---

<b>BIOS Setup .....</b>	<b>1</b>
<b>1 Main Menu .....</b>	<b>3</b>
<b>2 Standard CMOS Features.....</b>	<b>7</b>
<b>3 Advanced BIOS Features .....</b>	<b>9</b>
<b>4 Advanced Chipset Features.....</b>	<b>17</b>
<b>5 Integrated Peripherals.....</b>	<b>20</b>
<b>6 Power Management Setup.....</b>	<b>26</b>
<b>7 PnP/PCI Configurations.....</b>	<b>29</b>
<b>8 PC Health Status .....</b>	<b>32</b>
<b>9 Performance Booster Zone.....</b>	<b>35</b>

# **GF7050V-M7**

---

## **BIOS Setup**

### **Introduction**

The purpose of this manual is to describe the settings in the Phoenix-Award™ BIOS Setup program on this motherboard. The Setup program allows users to modify the basic system configuration and save these settings to CMOS RAM. The power of CMOS RAM is supplied by a battery so that it retains the Setup information when the power is turned off.

Basic Input-Output System (BIOS) determines what a computer can do without accessing programs from a disk. This system controls most of the input and output devices such as keyboard, mouse, serial ports and disk drives. BIOS activates at the first stage of the booting process, loading and executing the operating system. Some additional features, such as virus and password protection or chipset fine-tuning options are also included in BIOS.

The rest of this manual will to guide you through the options and settings in BIOS Setup.

### **Plug and Play Support**

This PHOENIX-AWARD BIOS supports the Plug and Play Version 1.0A specification.

### **EPA Green PC Support**

This PHOENIX-AWARD BIOS supports Version 1.03 of the EPA Green PC specification.

### **APM Support**

This PHOENIX-AWARD BIOS supports Version 1.1&1.2 of the Advanced Power Management (APM) specification. Power management features are implemented via the System Management Interrupt (SMI). Sleep and Suspend power management modes are supported. Power to the hard disk drives and video monitors can also be managed by this PHOENIX-AWARD BIOS.

# **GF7050V-M7**

---

## **ACPI Support**

Phoenix-Award ACPI BIOS support Version 1.0b of Advanced Configuration and Power interface specification (ACPI). It provides ASL code for power management and device configuration capabilities as defined in the ACPI specification, developed by Microsoft, Intel and Toshiba.

## **PCI Bus Support**

This PHOENIX-AWARD BIOS also supports Version 2.3 of the Intel PCI (Peripheral Component Interconnect) local bus specification.

## **DRAM Support**

DDR2 SDRAM (Double Data Rate Synchronous DRAM) is supported.

## **Supported CPUs**

This PHOENIX-AWARD BIOS supports the Intel CPU.

## **Using Setup**

Use the arrow keys to highlight items in most of the place, press <Enter> to select, use the <PgUp> and <PgDn> keys to change entries, press <F1> for help and press <Esc> to quit. The following table provides more detail about how to navigate in the Setup program by using the keyboard.

<b>Keystroke</b>	<b>Function</b>
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left (menu bar)
Right arrow	Move to the item on the right (menu bar)
Move Enter	Move to the item you desired
PgUp key	Increase the numeric value or make changes
PgDn key	Decrease the numeric value or make changes
+ Key	Increase the numeric value or make changes
- Key	Decrease the numeric value or make changes
Esc key	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu – Exit Current page and return to Main Menu
F1 key	General help on Setup navigation keys
F5 key	Load previous values from CMOS
F7 key	Load the optimized defaults
F10 key	Save all the CMOS changes and exit

# GF7050V-M7

---


## 1 Main Menu

Once you enter Phoenix-Award BIOS™ CMOS Setup Utility, the Main Menu will appear on the screen. The Main Menu allows you to select from several setup functions. Use the arrow keys to select among the items and press <Enter> to accept and enter the sub-menu.

### !! WARNING !!

For better system performance, the BIOS firmware is being continuously updated. The BIOS information described in this manual (**Figure 1, 2, 3, 4, 5, 6, 7, 8, 9**) is for your reference only. The actual BIOS information and settings on board may be slightly different from this manual.

■ **Figure 1: Main Menu**

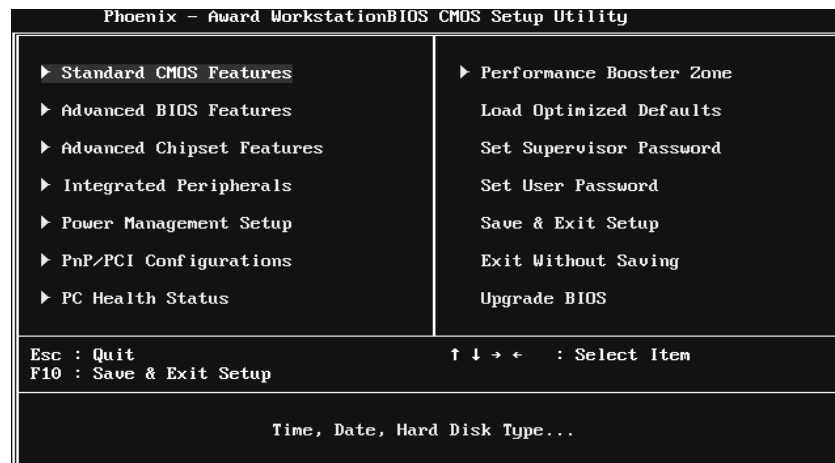

### Standard CMOS Features

This submenu contains industry standard configurable options.

# **GF7050V-M7**

---

## **Advanced BIOS Features**

This submenu allows you to configure advanced features of the BIOS.

## **Advanced Chipset Features**

This submenu allows you to configure special chipset features.

## **Integrated Peripherals**

This submenu allows you to configure certain IDE hard drive options and Programmed Input/ Output features.

## **Power Management Setup**

This submenu allows you to configure the power management features.

## **PnP/PCI Configurations**

This submenu allows you to configure certain “Plug and Play” and PCI options.

## **PC Health Status**

This submenu allows you to monitor the hardware of your system.

## **Performance Booster Zone**

This submenu allows you to change CPU Vcore Voltage and CPU/PCI clock. (However, we suggest you to use the default setting. Changing the voltage and clock improperly may damage the CPU or M/B!)

## **Load Optimized Defaults**

This selection allows you to reload the BIOS when problem occurs during system booting sequence. These configurations are factory settings optimized for this system. A confirmation message will be displayed before defaults are set.



Load Optimized Defaults (Y/N)? N

# GF7050V-M7

---

## **Set Supervisor Password**

Setting the supervisor password will prohibit everyone except the supervisor from making changes using the CMOS Setup Utility. You will be prompted with to enter a password.



```
Enter Password:
```

## **Set User Password**

If the Supervisor Password is not set, then the User Password will function in the same way as the Supervisor Password. If the Supervisor Password is set and the User Password is set, the “User” will only be able to view configurations but will not be able to change them.



```
Enter Password:
```

## **Save & Exit Setup**

Save all configuration changes to CMOS (memory) and exit setup. Confirmation message will be displayed before proceeding.



```
SAVE to CMOS and EXIT (Y/N)? Y
```

## **Exit Without Saving**

Abandon all changes made during the current session and exit setup. Confirmation message will be displayed before proceeding.



```
Quit Without Saving (Y/N)? N
```

## ***GF7050V-M7***

---

### **Upgrade BIOS**

This submenu allows you to upgrade bios.


BIOS UPDATE UTILITY (Y/N)? **N**

# GF7050V-M7

## 2 Standard CMOS Features

The items in Standard CMOS Setup Menu are divided into several categories. Each category includes no, one or more than one setup items. Use the arrow keys to highlight the item and then use the <PgUp> or <PgDn> keys to select the value you want in each item.

■ Figure 2: Standard CMOS Setup

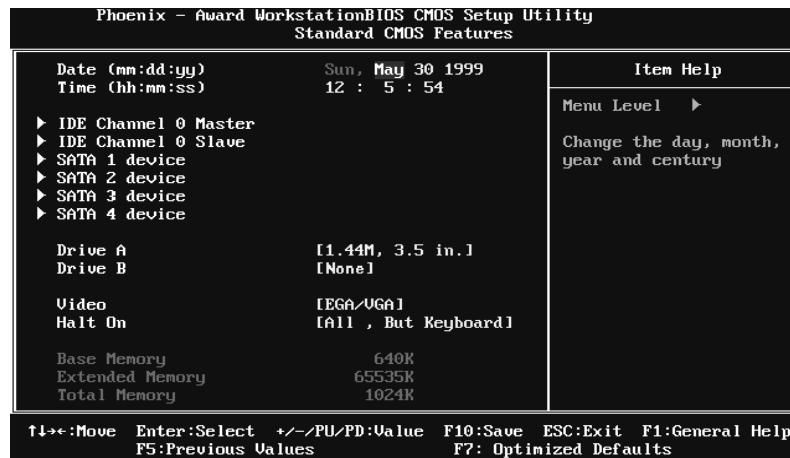

### Main Menu Selections

This table shows the items and the available options on the Main Menu.

Item	Options	Description
Date	mm : dd : yy	Set the system date. Note that the 'Day' automatically changes when you set the date.
Time	hh : mm : ss	Set the system internal clock.
IDE Channel 0 Master/Slave	Options are in its sub menu.	Press <Enter> to enter the sub menu of detailed options
SATA 1/2/3/4 Device	Options are in its sub menu.	Press <Enter> to enter the sub menu of detailed options.



## **GF7050V-M7**


---

<b>Item</b>	<b>Options</b>	<b>Description</b>
Drive A/B	360K, 5.25 in 1.2M, 5.25 in 720K, 3.5 in 1.44M, 3.5 in 2.88M, 3.5 in None	Select the type of floppy disk drive installed in your system.
Video	EGA/VGA CGA 40 CGA 80 MONO	Select the default video device.
Halt On	All Errors No Errors All, but Keyboard All, but Diskette All, but Disk/ Key	Select the situation in which you want the BIOS to stop the POST process and notify you.
Base Memory	N/A	Displays the amount of conventional memory detected during boot up.
Extended Memory	N/A	Displays the amount of extended memory detected during boot up.
Total Memory	N/A	Displays the total memory available in the system.

# GF7050V-M7

## 3 Advanced BIOS Features

■ Figure 3: Advanced BIOS Setup

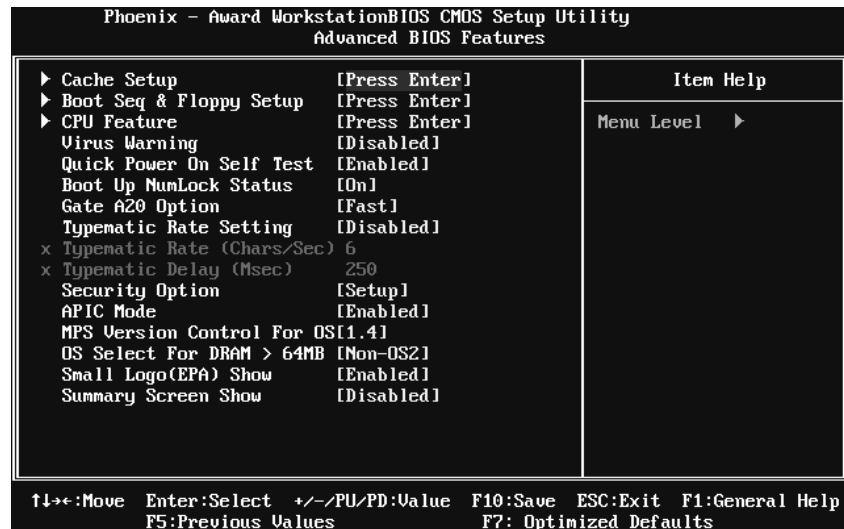

### Cache Setup



# GF7050V-M7

---

## CPU L3 Cache

Depending on the CPU/chipset in use, you may be able to increase memory access time with this option.

Enabled (default)	Enable cache.
Disabled	Disable cache.

## Boot Seq & Floppy Setup

This item allows you to setup boot sequence & Floppy.

Phoenix - Award WorkstationBIOS CMOS Setup Utility		
Boot Seq & Floppy Setup		
▶ Removable Device Priority	[Press Enter]	Item Help
▶ Hard Disk Boot Priority	[Press Enter]	
▶ CD-ROM Boot Priority	[Press Enter]	Menu Level ▶
First Boot Device	[Removable]	
Second Boot Device	[Hard Disk]	Select Removable Boot Device Priority
Third Boot Device	[CDROM]	
Boot Other Device	[Enabled]	
Swap Floppy Drive	[Disabled]	
Boot Up Floppy Seek	[Enabled]	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5:Previous Values F7: Optimized Defaults		

## GF7050V-M7

### Removable Device Priority

Select Removable Boot Device Priority.

Phoenix - AwardBIOS CMOS Setup Utility	
Removable Device Priority	
1. USB-ZIP0 : 2. LS120 3. USB-FDD1 : 4. Floppy Disks 5. USB-FDD0 : 6. USB-ZIP1 : 7. ZIP100	<b>Item Help</b>  Menu Level   ▶▶  Use <↑> or <↓> to select a device , then press <+> to move it up , or <-> to move it down the list. Press <ESC> to exit this menu.
F5:Previous Values    F6:Fail-Safe Defaults    F7:Optimized Defaults	

**The Choices:** Floppy Disks, Zip 100, USB-FDD0, USB-FDD1, USB-ZIP0, USB-ZIP1, LS120.

### Hard Disk Boot Priority

The BIOS will attempt to arrange the Hard Disk boot sequence automatically. You can change the Hard Disk booting sequence here.

Phoenix - AwardBIOS CMOS Setup Utility	
Hard Disk Boot Priority	
1. Pri.Master: 2. Pri.Slave : 3. Sec.Master: 4. Sec.Slave : 5. USBHDD0 : 6. USBHDD1 : 7. USBHDD2 : 8. Bootable Add-in Cards	<b>Item Help</b>  Menu Level   ▶▶  Use <↑> or <↓> to select a device , then press <+> to move it up , or <-> to move it down the list. Press <ESC> to exit this menu.
F5:Previous Values    F6:Fail-Safe Defaults    F7:Optimized Defaults	

**The Choices:** Pri. Master, Pri. Slave, Sec. Master, Sec. Slave, USB HDD0, USB HDD1, USB HDD2, and Bootable Add-in Cards.

# GF7050V-M7

## CD-ROM Boot Priority

Phoenix - AwardBIOS CMOS Setup Utility	
CD-ROM Boot Priority	
1. Pri.Master:	<b>Item Help</b>  Menu Level   ▶▶  Use <↑> or <↓> to select a device , then press <+> to move it up , or <-> to move it down the list. Press <ESC> to exit this menu.
2. USB-CDROM1:	
3. Sec.Slave :	
4. Pri.Slave :	
5. USB-CDROM0:	
6. Sec.Master:	
F5:Previous Values    F6:Fail-Safe Defaults    F7:Optimized Defaults	

**The Choices:** Pri. Master, Pri. Slave, Sec. Master, Sec. Slave, USB CDROM0, USB CDROM 1.

## First/Second/Third Boot Device

The BIOS will attempt to load the operating system in this order.

**The Choices:** Removable, Hard Disk, CDROM, Legacy LAN, Disabled.

## Boot Other Device

When enabled, BIOS will try to load the operating system from other device when it failed to load from the three devices above.

**The Choices:** Enabled (default), Disabled

## Swap Floppy Drive

For systems with two floppy drives, this option allows you to swap logical drive assignments.

**The Choices:** Disabled (default), Enabled.

## Boot Up Floppy Seek

When enabled, System will test the floppy drives to determine if they have 40 or 80 tracks during boot up. Disabling this option reduces the time it takes to boot-up.

**The Choices:** Enabled (default), Disabled.

# GF7050V-M7

---

## CPU Feature

Phoenix - AwardBIOS CMOS Setup Utility		
CPU Feature		
Item	Value	Item Help
PPM Mode	[Native Mode]	
Limit CPUID MaxVal	[Disabled]	
C1E Function	[Disabled]	
Execute Disable Bit	[Enabled]	
Virtualization Technology	[Enabled]	
Core Multi-Processing	[Enabled]	
F5: Previous Values F7: Optimized Defaults		

### PPM Mode

The Choices: Native Mode (default), SMM Mode.

### Limit CPUID MaxVal

Set Limit CPUID MaxVal to 3, it should be "Disabled" for Windows XP.

The Choices: Disabled (default), Enabled.

### C1E Function

This item allows you to configure the Enhanced Halt State (C1E) function, which may reduce the power consumption of your system when the system is idle.

The Choices: Disabled (default), Auto.

### Execute Disable Bit

This item allows you to configure the Execute Disabled Bit function, which protects your system from buffer overflow attacks.

The Choices: Enabled (default), Disabled.

# GF7050V-M7

---

## Virtualization Technology

Virtualization Technology can virtually separate your system resource into several parts, thus enhance the performance when running virtual machines or multi interface systems.

**The Choices:** **Enabled** (default), Disabled.

## Core Multi-Processing

**The Choices:** **Enabled** (default), Disabled.

## Virus Warning

This option allows you to choose the VIRUS Warning feature that is used to protect the IDE Hard Disk boot sector. If this function is enabled and an attempt is made to write to the boot sector, BIOS will display a warning message on the screen and sound an alarm beep.

**Disabled** (default)    Virus protection is disabled.  
**Enabled**                Virus protection is activated.

## Quick Power On Self Test

Enabling this option will cause an abridged version of the Power On Self-Test (POST) to execute after you power up the computer.

**Disabled**                Normal POST.  
**Enabled** (default)    Enable quick POST.

## Boot Up NumLock Status

Selects the NumLock State after the system switched on.

The Choices:

**On** (default)            Numpad is number keys.  
**Off**                      Numpad is arrow keys.

## Gate A20 Option

Select if chipset or keyboard controller should control Gate A20.

**Normal**                A pin in the keyboard controller controls GateA20.  
**Fast** (default)        Lets chipset control Gate A20.

# **GF7050V-M7**

---

## **Typematic Rate Setting**

When a key is held down, the keystroke will repeat at a rate determined by the keyboard controller. When enabled, the typematic rate and typematic delay can be configured.

**The Choices:** Disabled (default), Enabled.

## **Typematic Rate (Chars/Sec)**

Sets the rate at which a keystroke is repeated when you hold the key down.

**The Choices:** 6 (default), 8, 10, 12, 15, 20, 24, 30.

## **Typematic Delay (Msec)**

Sets the delay time after the key is held down before it begins to repeat the keystroke.

**The Choices:** 250 (default), 500, 750, 1000.

## **Security Option**

This option will enable only individuals with passwords to bring the system online and/or to use the CMOS Setup Utility.

**System:** A password is required for the system to boot and is also required to access the Setup Utility.

**Setup (default):** A password is required to access the Setup Utility only.

This will only apply if passwords are set from the Setup main menu.

## **APIC MODE**

Selecting Enabled enables APIC device mode reporting from the BIOS to the operating system.

**The Choices:** Enabled (default), Disabled.

## **MPS Version Control For OS**

The BIOS supports version 1.1 and 1.4 of the Intel multiprocessor specification. Select version supported by the operation system running on this computer.

**The Choices:** 1.4 (default), 1.1.



## ***GF7050V-M7***

---

### **OS Select For DRAM > 64MB**

A choice other than Non-OS2 is only used for OS2 systems with memory exceeding 64MB.

**The Choices:** Non-OS2 (default), OS2.

### **Small Logo(EPA) Show**

This item allows you to select whether the “Small Logo” shows. Enabled (default) “Small Logo” shows when system boots up. Disabled No “Small Logo” shows when system boots

**The Choices:** Enabled (default), Disabled.

### **Summary Screen Show**

This item allows you to enable/disable the summary screen. Summary screen means system configuration and PCI device listing.

**The Choices:** Disabled (default), Enabled.

## GF7050V-M7

### 4 Advanced Chipset Features

This submenu allows you to configure the specific features of the chipset installed on your system. This chipset manage bus speeds and access to system memory resources, such as DRAM. It also coordinates communications with the PCI bus. The default settings that came with your system have been optimized and therefore should not be changed unless you are suspicious that the settings have been changed incorrectly.

■ **Figure 4: Advanced Chipset Setup**

Phoenix - Award WorkstationBIOS CMOS Setup Utility		
Advanced Chipset Features		
► Spread Spectrum Control	[Press Enter]	Item Help
Onboard GPU	[Enable If No Ext GPU]	
Frame Buffer Size	[64M]	Menu Level ►
System BIOS Cacheable	[Disabled]	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5:Previous Values F7: Optimized Defaults		

# GF7050V-M7

## Spread Spectrum Control

Phoenix - Award WorkstationBIOS CMOS Setup Utility		
Spread Spectrum Control		
CPU Spread Spectrum	[Disabled]	Item Help
SATA Spread Spectrum	[Disabled]	Menu Level ▶
PCIE Spread Spectrum	[Disabled]	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5:Previous Values F7: Optimized Defaults		

### CPU Spread Spectrum

This item allows you to select the CPU Spread Spectrum function.

**The Choices:** 0.50% H.Kiss Cntr, 0.50% H.Kiss Down, 0.75% H.Kiss Cntr, 0.75% H.Kiss Down, **Disabled** (default).

### SATA Spread Spectrum

This item allows you to select the SATA Spread Spectrum function.

**The Choices:** **Disabled** (default), Linear Down.

### PCIE Spread Spectrum

This item allows you to select the PCIE Spread Spectrum function.

**The Choices:** **Disabled** (default), Linear Down.

## Onboard GPU

This item allows you to control the onboard GPU.

**The Choices:** **Enable IF No Ext GPU** (default).

## **GF7050V-M7**

---

### **Frame Buffer Size**

This item allows you to choose the frame buffer size of on-chip VGA.

**The Choices:** 64M (default), 16M, 32M, 128M, 256M, Disabled.

### **System BIOS Cacheable**

Selecting the “Enabled” option allows caching of the system BIOS ROM at F0000h-FFFFFh, which is able to improve the system performance. However, any programs that attempts to write to this memory block will cause conflicts and result in system errors.

**The Choices:** Disabled (default), Enabled.

# GF7050V-M7

## 5 Integrated Peripherals

■ Figure 5. Integrated Peripherals

Phoenix - Award WorkstationBIOS CMOS Setup Utility		
Integrated Peripherals		
► IDE Function Setup	[Press Enter]	Item Help
► MCP Storage Config	[Press Enter]	
OnChip USB	[U1.1+U2.0]	Menu Level ►
USB Memory Type	[Shadow]	
USB Keyboard/Storage Support	[Disabled]	
USB Mouse Support	[Disabled]	
HD Audio	[Auto]	
MAC Lan	[Auto]	
MAC Media Interface	[Pin Strap]	
Onboard Lan Boot ROM	[Disabled]	
IDE HDD Block Mode	[Enabled]	
POWER ON Function	[BUTTON ONLY]	
× KB Power ON Password	Enter	
× Hot Key Power ON	Ctrl-F1	
Onboard FDC Controller	[Enabled]	
Onboard Serial Port 1	[3F8/IRQ4]	
Onboard Parallel Port	[378/IRQ7]	
Parallel Port Mode	[SPP]	
× ECP Mode Use DMA	3	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5:Previous Values F7: Optimized Defaults		

### IDE Function Setup

Highlight the “Press Enter” label next to the “IDE Function Setup” label and press enter key will take you a submenu with the following options:

Phoenix - AwardBIOS CMOS Setup Utility		
IDE Function Setup		
OnChip IDE Channel0	[Enabled]	Item Help
Primary Master PIO	[Auto]	
Primary Slave PIO	[Auto]	Menu Level ►
Primary Master UDMA	[Auto]	
Primary Slave UDMA	[Auto]	
IDE DMA transfer access	[Enabled]	
Serial-ATA Controller	[Enabled]	
IDE Prefetch Mode	[Enabled]	
F5:Previous Values F7: Optimized Defaults		

# **GF7050V-M7**

---

## **On-chip IDE Channel 0**

The motherboard chipset contains a PCI IDE interface with support for two IDE channels. Select “Enabled” to activate the first and/or second IDE interface. Select “Disabled” to deactivate an interface if you are going to install a primary and/or secondary add-in IDE interface.

**The Choices:** Enabled (default), Disabled.

## **Primary Master/Slave PIO**

The IDE PIO (Programmed Input / Output) fields let you set a PIO mode (0-4) for each of the IDE devices that the onboard IDE interface supports. Modes 0 to 4 will increase performance progressively. In Auto mode, the system automatically determines the best mode for each device.

**The Choices:** Auto (default), Mode0, Mode1, Mode2, Mode3, Mode4.

## **Primary Master/Slave UDMA**

Ultra DMA function can be implemented if it is supported by the IDE hard drives in your system. As well, your operating environment requires a DMA driver (Windows 95 or OSR2 may need a third party IDE bus master driver). If your hard drive and your system software both support Ultra DMA, select Auto to enable BIOS support.

**The Choices:** Auto (default), Disabled.

## **IDE DMA Transfer Access**

This item allows you to enable or disable the IDE DMA transfer access.

**The Choices:** Enabled (default), Disabled.

## **Serial-ATA Controller**

This item allows you to enable or disable the Serial ATA function.

**The Choices:** Enabled (default), Disabled.

## **IDE Prefetch Mode**

The “onboard” IDE drive interfaces supports IDE prefetch function for faster drive access. If the interface on your drive does not support prefetching, or if you install a primary and/or secondary add-in IDE interface, set this option to “Disabled”.

**The Choices:** Enabled (default), Disabled.

# GF7050V-M7

## MCP Storage Config

Phoenix - AwardBIOS CMOS Setup Utility			
MCP Storage Config			
SATA Operation Mode			[IDE]
x	SATA 1	RAID	Disabled
x	SATA 2	RAID	Disabled
x	SATA 3	RAID	Disabled
x	SATA 4	RAID	Disabled
Item Help			
Menu Level    ▶▶			
F5:Previous Values		F7: Optimized Defaults	

### SATA Operation Mode

This option allows you to choose SATA function.

**The Choices:** IDE (default), RAID, AHCI, Linux AHCI.

### SATA 1/2/3/4 RAID

This option allows you to enable or disable SATA Primary/Secondary RAID.

**The Choices:** Disabled (default), Enabled.

## OnChip USB

This option should be enabled if your system has a USB installed on the system board. You may need to disable this feature if you add a higher performance controller.

**The Choices:** V1.1+V2.0 (default), Disabled, V1.1

## USB Memory Type

This option allows you to choose the USB memory type.

**The Choices:** SHADOW (default), Base Memory(640K).

# GF7050V-M7

---

## **USB Keyboard/Storage Support**

This item allows you to enable or disable the USB Keyboard / storage Legacy Support.

Enabled	Enable USB Keyboard / storage Support.
<b>Disabled</b> (default)	Disable USB Keyboard/ storage Support.

## **USB Mouse Support**

This item allows you to enable or disable the USB mouse Legacy Support.

Enabled	Enable USB mouse Support.
<b>Disabled</b> (default)	Disable USB mouse Support.

## **HD Audio**

This option allows you to control the onboard HD audio.

**The Choices:** **Auto** (default), Disabled.

## **MAC LAN**

This option allows you to control the onboard LAN.

**The Choices:** **Auto** (default), Disabled.

## **MAC Media Interface**

This option allows you to select the MAC media interface..

**The Choices:** **Pin Strap** (default), MII, RGMII.

## **Onboard LAN Boot ROM**

This item allows you to enable or disable the Onboard LAN Boot ROM.

**The Choices:** **Disabled** (default), Enabled.



# **GF7050V-M7**

---

## **IDE HDD Block Mode**

Block mode is also called block transfer, multiple commands, or multiple sectors read / write. If your IDE hard drive supports block mode (most new drives do), select Enabled for automatic detection of the optimal number of block mode (most new drives do), select Enabled for automatic detection of the optimal number of block read / write per sector where the drive can support.

**The Choices:** Enabled (default), Disabled.

## **POWER ON Function`**

This item allows you to choose the power on method.

**The Choices:** Button Only(default), Password, Hot Key, Mouse Move, Mouse Click, Any Key, Keyboard 98.

## **KB Power ON Password**

Input password and press Enter to set the Keyboard power on password.

## **Hot Key Power ON**

Choose the Hot Key combination to boot up the system.

**The Choices:** Ctrl-F1(default), Ctrl-F2, Ctrl-F3, Ctrl-F4, Ctrl-F5, Ctrl-F6, Ctrl-F7, Ctrl-F8, Ctrl-F9, Ctrl-F10, Ctrl-F11, and Ctrl-F12.

## **Onboard FDC Controller**

Select enabled if your system has a floppy disk controller (FDC) installed on the system board and you wish to use it. If you installed another FDC or the system uses no floppy drive, select disabled in this field.

**The Choices:** Enabled (default), Disabled.

## **Onboard Serial Port 1**

Select an address and corresponding interrupt for the first and second serial ports.

**The Choices:** 3F8/IRQ4 (default), Disabled, 2F8/IRQ3, 3E8/IRQ4, 2E8/IRQ3, Auto.

# **GF7050V-M7**

---

## **Onboard Parallel Port**

This item allows you to determine access onboard parallel port controller with which I/O Address.

**The Choices:** 378/IRQ7 (default), 278/IRQ5, 3BC/IRQ7, Disabled.

## **Parallel Port Mode**

This item allows you to determine how the parallel port should function. The default value is SPP.

**The Choices:**

SPP (default)	Using Parallel port as Standard Printer Port.
EPP	Using Parallel Port as Enhanced Parallel Port.
ECP	Using Parallel port as Extended Capabilities Port.
ECP+EPP	Using Parallel port as ECP & EPP mode.

## **ECP Mode Use DMA**

Select a DMA Channel for the port.

**The Choices:** 3 (default), 1.

## **PWRON After PWR-Fail**

This setting specifies how your system should behave after a power fail or interrupts occurs. By choosing off will leave the computer in the power off state. Choosing On will reboot the computer. Former-Sts will restore the system to the status before power failure or interrupt occurs.


**The Choices:** Off (default), On, Former-Sts.

# GF7050V-M7

## 6 Power Management Setup

The Power Management Setup Menu allows you to configure your system to utilize energy conservation and power up/power down features.

■ Figure 6. Power Management Setup

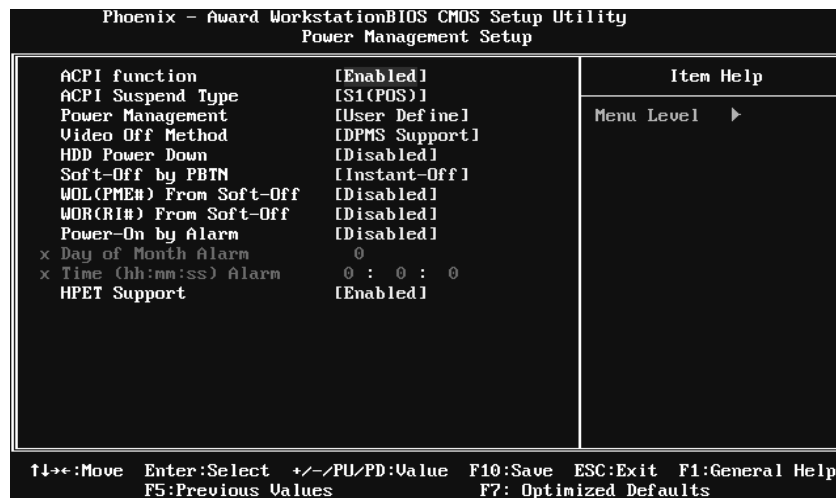

### ACPI Function

This item displays the status of the Advanced Configuration and Power Management (ACPI).

**The Choices:** Enabled (default), Disabled.

### ACPI Suspend Type

The item allows you to select the suspend type under the ACPI operating system.

**The Choices:** S1 (POS) (default) Power on Suspend  
S3 (STR) Suspend to RAM  
S1 & S3 POS+STR

# GF7050V-M7

---

## **Power Management**

This category allows you to select the power saving method and is directly related to the following modes:

1. HDD Power Down.
2. Suspend Mode.

There are three options of Power Management, three of which have fixed mode settings

### *Min. Power Saving*

Minimum power management.

Suspend Mode = 1 hr.

HDD Power Down = 15 min

### *Max. Power Saving*

Maximum power management only available for s1 CPU's.

Suspend Mode = 1 min.

HDD Power Down = 1 min.

### **User Define (default)**

Allow you to set each option individually.

When you choose user define, you can adjust each of the item from 1 min. to 1 hr. except for HDD Power Down which ranges from 1 min. to 15 min.

## **Video Off Method**

This option determines the manner when the monitor goes blank.

### V/H SYNC+Blank

This selection will cause the system to turn off the vertical and horizontal synchronization ports and write blanks to the video buffer.

### Blank Screen

This option only writes blanks to the video buffer.

### **DPMS Support (default)**

Initial display power management signaling.

## **HDD Power Down**

When enabled, the hard-disk drives will power down after a set time of system inactivity. All other devices remain active.

**The Choices: Disabled** (default), 1 Min, 2 Min, 3 Min, 4 Min, 5 Min, 6 Min, 7 Min, 8 Min, 9 Min, 10 Min, 11 Min, 12 Min, 13 Min, 14 Min, 15Min.

## **GF7050V-M7**

---

### **Soft-Off by PBTN**

This item determines the behavior of system power button. Instant off turn off the power immediately, and Delay 4 Sec. will require you to press and hold the power button for 4 seconds to cut off the system power.

**The Choices:** Delay 4 Sec, **Instant-Off** (default).

### **WOL(PME#)/ From Soft-Off**

This item allows you to enable or disable Wake On LAN from Soft-Off function.

**The Choices:** **Disabled** (default), Enabled.

### **WOR(RI#) From Soft-Off**

This item allows you to enable or disable Wake On Ring from Soft-Off function.

**The Choices:** **Disabled** (default), Enabled.

### **Power-On by Alarm**

This function is for setting date and time for your computer to boot up. When enabled, you can choose the date and time to boot up the system.

**The Choices:** **Disabled** (default), Enabled.

Date (of Month) Alarm

You can choose which month the system will boot up.

Time (hh:mm:ss) Alarm

You can choose the system boot up time, input hour, minute and second to specify.

**Note: If you have change the setting, you must let the system boot up until it goes to the operating system, before this function will work.**

### **HPET Support**

This option allows you to disabled or enables the High Precision Event Timer.

**The Choices:** **Enabled** (default), Disabled.

# GF7050V-M7

## 7 PnP/PCI Configurations

This section describes configuring the PCI bus system. PCI, or Personal Computer Interconnect, is a system which allows I/O devices to operate at speeds nearing the speed of the CPU itself uses when communicating with its own special components. This section covers some very technical items and it is strongly recommended that only experienced users should make any changes to the default settings.

■ Figure 7: PnP/PCI Configurations

Phoenix - AwardBIOS CMOS Setup Utility		
PnP/PCI Configurations		
Init Display First	[PCIEx]	Item Help
Reset Configuration Data	[Disabled]	
Resources Controlled By	[Auto(ESCD)]	Menu Level ▶
× IRQ Resources	Press Enter	
PCI/UGA Palette Snoop	[Disabled]	
** PCI Express relative items **		
Maximum Payload Size	[4096]	

↑↓←→:Move	Enter:Select	+/-/PU/PD:Value	F10:Save	ESC:Exit	F1:General Help
F5:Previous Values			F7: Optimized Defaults		

### Init Display First

This item allows you to decide to active whether PCI Slot or on-chip VGA first.  
**The Choices:** PCI Slot, **PCIEx** (default).

### Reset Configuration Data

The system BIOS supports the PnP feature which requires the system to record which resources are assigned and protects resources from conflict. Every peripheral device has a node, which is called ESCD. This node records which resources are assigned to it. The system needs to record and update ESCD to the memory locations. These locations are reserved in the system BIOS. If the Disabled (default) option is chosen, the system's ESCD will update only when the new configuration varies from the last one. If the Enabled option is chosen, the system is forced to update ESCDs and then is automatically set to the

## **GF7050V-M7**

---

“Disabled” mode.

The above settings will be shown on the screen only if “Manual” is chosen for the resources controlled by function.

Legacy is the term, which signifies that a resource is assigned to the ISA Bus and provides non-PnP ISA add-on cards. PCI / ISA PnP signify that a resource is assigned to the PCI Bus or provides for ISA PnP add-on cards and peripherals.

**The Choices:** Disabled (default), Enabled.

### **Resources Controlled By**

By Choosing “**Auto(ESCD)**” (default), the system BIOS will detect the system resources and automatically assign the relative IRQ and DMA channel for each peripheral. By Choosing “Manual”, the user will need to assign IRQ & DMA for add-on cards. Be sure that there are no IRQ/DMA and I/O port conflicts.

**The Choices:** Auto (ESCD) (default), Manual.

### **IRQ Resources**

This submenu will allow you to assign each system interrupt a type, depending on the type of device using the interrupt. When you press the “Press Enter” tag, you will be directed to a submenu that will allow you to configure the system interrupts. This is only configurable when “Resources Controlled By” is set to “Manual”.

IRQ-5	assigned to PCI Device
IRQ-7	assigned to PCI Device
IRQ-9	assigned to PCI Device
IRQ-10	assigned to PCI Device
IRQ-11	assigned to PCI Device
IRQ-14	assigned to PCI Device
IRQ-15	assigned to PCI Device

## ***GF7050V-M7***

---

### **PCI / VGA Palette Snoop**

Some old graphic controllers need to “snoop” on the VGA palette and then map it to their display as a way to provide boot information and VGA compatibility. This item allows such snooping to take place.

**The Choices:** **Disabled** (default), Enabled

### **Maximum Payload Size**

Set the maximum payload size for Transaction packets (TLP).

**The Choice:** **4096** (default.), 128, 256, 512, 1024, 2048.



# GF7050V-M7

## 8 PC Health Status

■ Figure 8: PC Health Status

Phoenix - AwardBIOS CMOS Setup Utility		
PC Health Status		
▶ Smart Fan Option	[Press Enter]	Item Help
Shutdown Temperature	[Disabled]	Menu Level ▶
Show H/W Monitor in POST	[Enabled]	
CPU Vcore		
NB Voltage		
+ 3.3 V		
+ 5.0 V		
+12.0 V		
DDR Voltage		
UTI Voltage		
5V(SB)		
Voltage Battery		
CPU Temperature		
CPU FAN Speed		
SYS FAN Speed		
F5:Previous Values		F7: Optimized Defaults

### Smart Fan Option

Phoenix - Award WorkstationBIOS CMOS Setup Utility		
Smart Fan Option		
CPU Smart Fan	[Disabled]	Item Help
× Smart Fan Calibration	Press Enter	Menu Level ▶▶
× PWM Duty Off(°C)	16	
× PWM Duty Start(°C)	30	
× Start PWM Value	32	
× Smart FAN Slope	64	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5:Previous Values		F7: Optimized Defaults

# GF7050V-M7

---

## CPU Smart Fan

This item allows you to control the CPU Fan.

**The Choices:** Disabled (default), Auto, 4-pin, 3-pin..

## Smart Fan Calibration

Choose this item and then the BIOS will auto test and detect the CPU fan functions and show CPU fan speed.

## PWM Duty Off<°C>

If the CPU Temperature is lower than the set value, FAN will turn off.

**The Choices:** Min=0,.Max=127, Key in a DEC number.

## PWM Duty Start<°C>

CPU fan starts to work under smart fan function when arrive this set value.

**The Choices:** Min=0,.Max=127, Key in a DEC number.

## Start PWM Value

When CPU temperature arrives to the set value, the CPU fan will work under Smart Fan Function mode. The range is from 0~127, with an interval of 1.

**The Choices:** Min=0,.Max=127, Key in a DEC number.

## Smart Fan Slope

Increasing the value of slope PWM will raise the speed of CPU fan.

**The Choices:** Min=1,.Max=127, Key in a DEC number.

## Shutdown Temperature

This item allows you to set up the CPU shutdown Temperature. This item is only effective under Windows 98 ACPI mode.

**The Choices:** Disabled(default) , 60°C / 140°F, 65°C / 149°F, 70°C / 158°F, 75°C / 167°F, 80°C / 176°F, 85°C / 185°F, 90°C / 167°F.

## Show HW Monitor in POST

If you computer contains a monitoring system, it will show PC health status during POST stage. The item offers several different delay times.

**The Choices:** Enabled (default), Disabled.

## ***GF7050V-M7***

---

### **CPU Vcore, NB Voltage, +3.3V, +5.0V, +12.0V, DDR Voltage, VTT Voltage, 5V(SB), Voltage Battery**

Detect the system's voltage status automatically.

### **CPU Temperature**

This field displays the current temperature of CPU.

### **CPU FAN Speed**

This field displays the current speed of CPU fan.

### **SYS FAN Speed**

This field displays the current speed SYSTEM fan.

# GF7050V-M7

## 9 Performance Booster Zone

Phoenix - Award WorkstationBIOS CMOS Setup Utility Performance Booster Zone			
Parameters	Setting	Current Value	Item Help
Current CPU Freq. MHz			Menu Level ▶
CPU Multiplier			
FSB-Memory Clock Mode	[Auto]		
× FSB-Memory Ratio		Auto	
× FSB (QDR), MHz		Auto	
Actual FSB (QDR), MHz			
× MEM (DDR), MHz		Auto	
Actual MEM (DDR), MHz			
▶ Memory Timing Setting	[Press Enter]		
DDR Voltage		[1.95V]	
NB Voltage		[100%]	
VIT Voltage		[100%]	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F7: Optimized Defaults			

### FSB-Memory Clock Mode

This item allows you to choose the memory clock mode.

**The Choices:** Auto (default), Linked, Unlinked.

### FSB-Memory Ratio

This item allows you to choose the memory clock mode.

**The Choices:** Auto (default)

### FSB (QDR), MHz

This item allows you to choose the memory clock mode.

**The Choices:** Auto (default)

### MEM (DDR), MHz

This item allows you to choose the memory clock mode.

**The Choices:** Auto (default)

# GF7050V-M7

## Memory Timing Setting

Phoenix - Award WorkstationBIOS CMOS Setup Utility			
Memory Timing Setting			
Parameters	Setting	Current Value	Item Help
Memory Timing Setting [Optimal]			Menu Level ▶
× tCL(CAS Latency)	Auto<0>		
× tRCD	Auto<0>		
× tRP	Auto<0>		
× tRAS	Auto<0>		
× Command Per Clock(CMD)	Auto<0T>		
** Advanced Memory Settings **			
× tRRD	Auto<0>		
× tRC	Auto<0>		
× tWR	Auto<0>		
× tWTR	Auto<0>		
× tREF	Auto		
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help			
F5:Previous Values F7: Optimized Defaults			

### Memory Timing Setting

This item allows you to choose to manually or automatically regulate the DDR Timing.

The Choices: Optimal (default), Expert

#### tCL (CAS Latency)

The Choices: Auto (default), 3 CLK ~ 6 CLK.

#### tRCD

The Choices: Auto (default), 3 CLK ~ 6 CLK.

#### tRP

The Choices: Auto (default), 3 CLK ~ 6 CLK.

#### tRAS

The Choices: Auto (default), 5 CLK ~ 18 CLK.

#### Command Per Clock (CMD)

The Choices: Auto (default), 1T, 2T.

# **GF7050V-M7**

---

## **tRRD**

**The Choices:** Auto (default), 2 CLK ~ 5 CLK.

## **tRC**

**The Choices:** Auto (default), 11 CLK ~ 26 CLK.

## **tWR**

**The Choices:** Auto (default), 3 CLK ~ 6 CLK.

## **tWTR**

**The Choices:** Auto (default), 1 CLK ~ 3 CLK.

## **tREF**

**The Choices:** Auto (default), 7.8 us, 3.9 us.

## **DDR Voltage**

This item allows you to select DDR Voltage Control.

**The Choices:** 1.95V (default), 2.05V, 2.15V, 2.20V, 2.25V, 2.30V, 2.40V, 2.50V.

## **NB Voltage**

This item allows you to select Northbridge Voltage Control.

**The Choices:** 100% (default).

## **VTT Voltage**

This item allows you to select VTT Voltage Control.

**The Choices:** 100% (default).